

TiltingMast 300/400/500


The Tiltingmasts are designed for permanent installations where reliable video surveillance is essential. These masts offer an ideal combination of stability and ease of use and are available in heights of 9.84, 13.12 and 16.40 feet. The Tiltingmasts consists of a fixed base frame on which an extension with a triangular shaped bracket is mounted, available in various lengths.

This modular design allows the mast to be configured to the desired height during installation, depending on the specific needs of the location. Additionally, the mast features a convenient housing in which equipment and cables can be neatly stored, accessible via a back panel for easy maintenance and adjustments.

Thanks to the tiltable function, surveillance equipment can be installed with ease, while the sturdy construction ensures long-lasting performance under various weather conditions. Whether for construction sites, industrial sites, parking areas, or other permanent locations, the Tiltingmast provides efficient and reliable video surveillance.

Specifications

TELESCOPICMAST

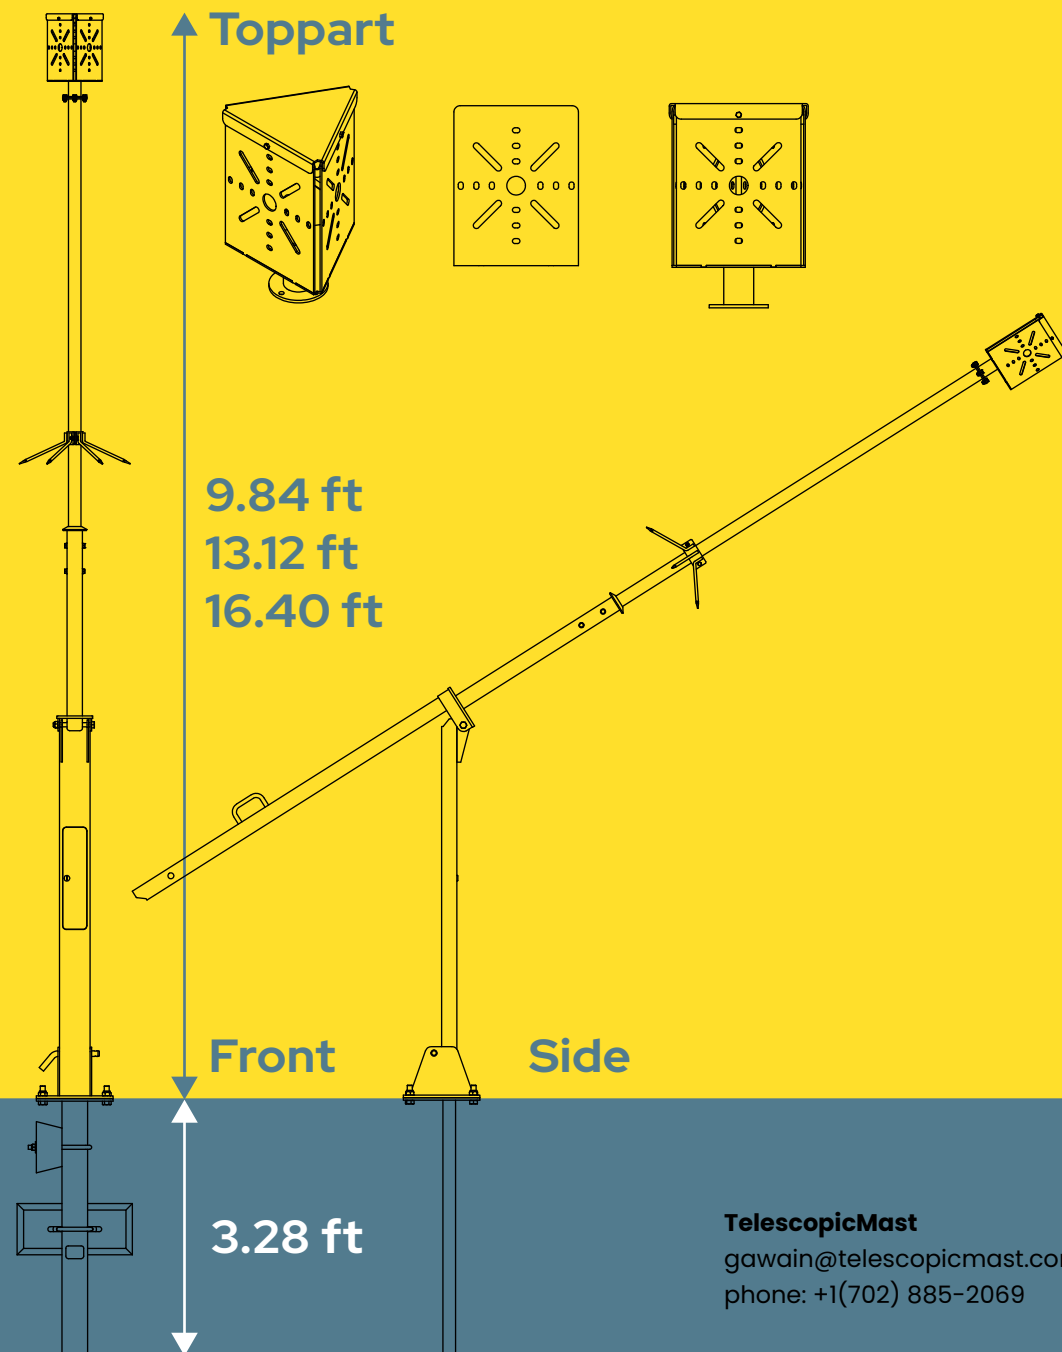

Type	Tiltable camera mast
Certification	TÜV Rheinland, CE
Height	9.84, 13.12 and 16.40 feet
Concrete ballast blocks	2
Toppart	Triangular bracket
Maximum load capacity	3 pieces
Lockable watertight cable box	Yes

TelescopicMast
gawain@telescopicmast.com
phone: +1(702) 885-2069